

Finnex®

HMH SERIES | FINNEX TITANIUM AQUARIUM HEATER

Thank you for purchasing a Finnex titanium aquarium heater. Our heaters are constructed of the finest materials for outstanding reliability and performance. Please read and follow all the instructions for proper set-up and use contained in this guide. If you require assistance, please contact us at:

✉ Customer_service@finnex.net.

Important Safety Instructions



Warning: To guard against injury, basic safety precautions should be observed, including the following:

1. Read and follow all safety instructions and all the important notices on the heater before using. Failure to do so may result in loss of fish life and/or damage to this heater.
2. **DANGER** – To avoid possible electric shock, special care should be taken since water is employed in the use of aquarium equipment. For each of the following situations, do not attempt repairs yourself; return the heater to Finnex for service or discard the heater.
 - a. If the heater shows any sign of damage, immediately unplug it from the power source.
 - b. Carefully examine the heater after installation. Prior to installation, carefully check and make sure the components appear in working order.
 - c. Do not operate any equipment if it has a damaged cord or plug, if it is malfunctioning or it is dropped or damaged in any manner. The power cord of this heater cannot be replaced; if the cord is damaged, the heater should be discarded immediately. Never cut the cord or try to repair it.
 - d. To avoid the possibility of the heater's plug or receptacle getting wet, position the heater to one side of a wall mounted receptacle to prevent water from dripping on to the receptacle or plug. A "drip loop" (see figure #2.) should be arranged by the user for the cord connecting appliance to a receptacle. The drip loop is that part of the cord below the level of the receptacle, to prevent water traveling along the cord and coming in contact with the receptacle. If the plug or receptacle does get wet, DON'T unplug the cord. Disconnect the fuse or circuit breaker that supplies power to the appliance. Then unplug and examine for presence of water in the receptacle.
3. This heater is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.
4. To avoid injury, do not touch hot parts.
5. **CAUTION:** Always unplug or disconnect all appliances in the aquarium from electricity supply before carrying out maintenance. When inserting or removing the heater from the water, always pull out the electricity plug. Do not remove the heater from the water until it has been allowed to cool for at least 15 minutes. Never yank cord to pull plug from outlet. Grasp the plug and pull to disconnect. Always unplug an appliance from an outlet when not in use.
6. This is an aquarium heater. Do not use it for other than the intended use (i.e.: don't use this heater on swimming pools, garden ponds, bathrooms, etc.). The use of attachments not recommended or sold by the appliance manufacturer may cause a dangerous situation.
7. This heater is suitable for **INDOOR** use only. Do not install or store the heater where it will be exposed to the weather or to temperatures below freezing.
8. Make sure that the heater is securely installed before operating it. The heater must be completely immersed in water. This aquarium heater must never operate outside of water. The heater must never operate without the heater guard.
9. If an extension cord is necessary, a cord with proper rating should be used. A cord rated for less amperes or watts than the heater rating may overheat. Care should be taken to arrange the cord so that it will not be tripped over or pulled. The connection should be carried out by a qualified electrical installer.
10. For added safety, this product must be plugged into a receptacle controlled by a GFCI (ground fault interrupter) circuit breaker.
11. **SAVE THESE INSTRUCTIONS!**



The out-of-water sensor is located where the heater meets the heater cord. ALWAYS secure this portion of the heater in a more elevated position than the rest of the heater. Clean and confirm out-of-water sensor is functioning properly every 30 days. DO NOT USE heater if out-of-water sensor is inoperative.

HMH Series Overview

The HMH heater series uses an advanced digital processor that monitors and controls the water temperature in your aquarium. The heating controller receives temperature data from a sensor in the heater tube. The internal sensor contains no bi-metallic contacts to arc, corrode or wear out. This allows HMH heaters to have precise control, keeping the water temperature stable while avoiding wide temperature swings found with low-quality aquarium heaters. The controller displays the current temperature, allowing you to easily make temperature adjustments on the front panel. Temperature can be adjusted by a tenth of a degree.

The internal sensor functions as an automatic power cut-off switch. If the water level drops too low and exposes the heater tube to the air, power to the heater is turned off. This prevents over-heating of the aquarium, saving your prized aquarium life from harm. The heater is constructed of corrosion-resistant titanium, making it safe for freshwater and marine aquariums. The heater tube is virtually unbreakable and features a protective heater guard to prevent aquatic life from accidentally coming in contact with the heating tube.

| Model | Wattage | Amperage (115V) | Control Range | Water Volume | Power Cord (Inches) | Controller to Heater Cord (Inches) | Sensor Cord (Inches) | Tube Length (Inches) |
|----------|-----------|-----------------|---------------|--------------|---------------------|------------------------------------|----------------------|----------------------|
| HMH-50S | 50 Watts | 0.45A | 50°F - 94°F | 10-20G | 47 | 30 | 47 | 6.70 |
| HMH-100S | 100 Watts | 0.90A | 50°F - 94°F | 20-30G | 47 | 30 | 47 | 7.68 |
| HMH-150S | 150 Watts | 1.35A | 50°F - 94°F | 30-60G | 55 | 35.4 | 47 | 8.86 |
| HMH-200S | 200 Watts | 1.80A | 50°F - 94°F | 60-80G | 55 | 35.4 | 47 | 11.61 |
| HMH-300S | 300 Watts | 2.70A | 50°F - 94°F | 80-100G | 55 | 39 | 47 | 12.80 |
| HMH-500S | 500 Watts | 4.50A | 50°F - 94°F | 100-120G | 55 | 47 | 47 | 15.55 |




Fig. 1



Installing & Setting Up The Heater (Read Before Operating)

We recommend filling the aquarium with water that is close to the desired temperature you are trying to achieve. This will make the initial set-up faster and easier. To ensure even and thorough distribution of warm aquarium water and to provide accurate temperature readings, the heater and temperature sensor must be placed near a source of water movement. Using the suction cups, mount the heater near an aquarium filter, wave maker or other area of constant water movement. The heater can also be placed in a filter sump.

1. Position the heater and temperature sensor in the aquarium or sump and press suction cups firmly against glass. Ensure the built-in water sensor is in a more elevated position than the rest of the heater. **Important:** Position the heater where water can freely flow around the tube to ensure even heat dispersion. Do not forcefully position the heater in locations that put pressure on the heater's endcaps and power cord.
2. Allow heater to acclimate to the aquarium water temperature for 15 minutes before plugging it into the electrical outlet. **Important:** Form a drip loop to ensure that water cannot travel along the power cord and into the electrical outlet - see figure #2.
3. After 15 minutes, plug in the heater and set the water temperature. Refer to "How To Set The Water Temperature" below.



Warning: The heater must never be operated outside of the aquarium. If the heater is exposed to the air, the controller will turn the heater off. The controller will need to be re-set once the heater is submerged in water. When removing the heater from the aquarium, disconnect the heater from the electrical outlet and allow it to cool down for 15 minutes.

How to set the water temperature

When the heater is plugged in, the controller will display the current temperature. The desired water temperature can be raised or lowered in 1/10th degree increments. The accuracy of the temperature display is +/- 0.5°F.

1. Press the power button **once**. The display will start flashing, indicating it is in adjustment mode.
2. Use the "+" and "-" buttons to adjust the temperature.
3. To save the setting and return to normal operation, press the power button once. The display will stop flashing and show the current water temperature. **Note:** The controller will automatically save the setting and return to normal operation if no further adjustments are made after 5 seconds.

A red LED above the display will turn on whenever the heater is switched on by the controller. The red LED will turn off once the aquarium water has reached the desired temperature. If the aquarium is filled with very cold water, it will take longer for the heater to warm the water. In cold water the heater will cycle on and off while raising the water temperature.

Temperature controller calibration

The temperature controller and sensor have been calibrated at the factory. You can calibrate the unit by 1/10th degree increments if necessary. You'll need a high-quality scientific-grade thermometer to obtain the baseline water temperature in the aquarium. Inexpensive "stick-on" and floating thermometers are not suitable for calibration. Press the "CA" button once to enter the calibration mode. Use the "+" and "-" buttons to adjust the temperature. Press the "CA" button to exit the calibration mode.

Low water warning system

If the water level drops and exposes out of water sensor, it will automatically shut off and sound an audible alarm. Error code "EE2" will be displayed. To silence the alarm and resume normal operation the heater must first be submerged in aquarium water. Then, press and hold the power button for 3 seconds to re-set the controller.

*Low water warning system functions between 58°F - 92°F. Outside of 58°F - 92°F, the low water warning system is disabled.

Proper maintenance and troubleshooting

The heater, endcaps, and remote sensors should be free of algae, debris, calcium carbonate deposits and coralline algae to function properly. Use a soft brush to keep the sensor and heater free of build-up. To remove stubborn mineral build-up, disconnect the heater from the electrical outlet and allow it to cool for 15 minutes. Soak the heater and sensor in vinegar for about 30 minutes then gently brush away the loose mineral scale. Rinse and re-install the heater in your aquarium.

Troubleshooting the heater

Error Code EE1: Defective internal sensor. Contact Finnex support

Error Code EE2: Sensor has been exposed to air or water level has dropped below the safe zone. Submerge the sensor and re-set the controller by holding the power button for three seconds.

Controller shows a red light. The red LED turns on when the heater is actively heating the aquarium water. This is normal.

The controller does not display any information. Check the power cord. Check the circuit breaker or GFCI. Contact Finnex if this condition continues

Heater continues to heat while low water sensor is out of water. If the temperature is outside of 58°F - 92°F, the low water warning system is disabled. Ensure heater and sensor probes are fully submerged until temperatures fall within 58°F - 92°F for the low water warning system to reactivate.

Heater is above 95F and there is an audio alert going off. This is the overheating alert system notifying users of temperatures exceeding 95°F. Unplug and cease using the heater.

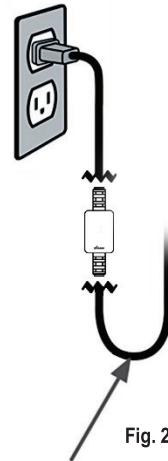


Fig. 2

DRIP LOOP



FINNEX Limited Warranty

FINNEX's warranty gives certain rights and may also have other rights, which may vary from state to state. Warranty is given only to the end-use purchaser of the accompanying product (referred to in this warranty as "The Product")

What is covered?

Products are warranted by JSK Merchandising Inc. To the original purchaser against defective material and workmanship under normal use for a period of 180 days from the date of the original purchase.

What Is Not Covered?

Products have no warranty if: 1) the product has been serviced, modified or tampered with by anyone other than JSK Merchandising Inc., 2) the product has been abused or damaged, 3) the product has been transported without the proper packaging.

Improper Application - Units are intended for indoor aquarium use only!

Application for anything but the noted is not recommended and voids warranty coverage.

Dry Burns - Dry burning the heater tubes are not covered. This can occur when your heating element is not fully submerged beneath water. Exposing the heating element to air while heating will cause a dry burn which will not be covered.

Water Damage - Water damage to the heater controller will be void of their warranty.

Abuse - Applications other than standard indoor aquarium use. If product is determined to have been abused beyond specifications intended for, warranty will not be in effect. Extreme conditions, including application in outdoor ponds, unheated home i.e. garage and/or basements are categorized as abuse.

Tampered Items - Items opened or items that appear to be manipulated in any way will be void of their warranty.



Warning: Production Dates and Dealer Lots are revealed via serial numbers contained in heater's IC. Identifying a Production Date and Dealer Lot different from the product shown on the receipt will result in a loss of return. If unit does not fall under warranty, item will be destroyed by Finnex after seven days from initial notice unless return shipping is paid by returnee.

What JSK Merchandising Inc., will do

If the product proves defective under the coverage of this warranty, JSK Merchandising Inc. will, at its option, repair or replace on an exchange basis, the product with the same or similar model. JSK Merchandising Inc. reserves the right to supply refurbished replacement products provided that the replacement products conform to the manufacturer's specifications for new products. The repaired or replacement product will be returned to you at no cost.

Limitations:

This warranty is limited to repair or replacement of this product, the warranty does not cover personal injury, property loss, including livestock or any direct, indirect incidental or consequential damages or specific relief. Warranty is void for products sold and or used outside the United States of America. Returns for services from area other than the lower 48 states of the USA, customers must pay both way of shipping and additional fees may apply.

What to do if you believe your product is defective?

To initiate a warranty claim, please gather the following documentation. The name of the product, a receipt indicating the date and place of purchase, a detailed description about the problem that is occurring, and the steps you have already taken as described on the troubleshooting page.

Direct the requested information here:

<https://www.finnex.net/customer-service>

Distributed by
JSK Merchandising, Inc.,
Countryside, Illinois
Made in Taiwan

Finnex®

www.finnex.net